INSTALLATION INFORMATION

All dimensions in millimetres

Full overlay K0



Mounting plate height 2

Door overlay \ Cup distance	3	4	5	6	7
24.0					-2
23.0				-2	
22.0			-2		0
21.0		-2		0	
20.0	-2		0		2
19.0		0		2	3
18.5					3.5
18.0	0		2	3	
17.5				3.5	
17.0		2	3		
16.5			3.5		
16.0	2	3			
15.5		3.5			
15.0	3				
14.5	3.5				

Mounting plate height

Overlay K3



Mounting plate height 2

Door overlay \ Cup distance	3	4	5	6	7
21.0					-2
20.0				-2	
19.0			-2		0
18.0		-2		0	
17.0	-2		0		2
16.5					
16.0		0		2	3
15.5					3.5
15.0	0		2	3	
14.5				3.5	
14.0		2	3		
13.5			3.5		
13.0	2	3			
12.5		3.5			
12.0	3				
11.5	3.5				

Mounting plate height

Half overlay K9.5



Mounting plate height 2

Door overlay \ Cup distance	3	4	5	6	7
14.5					-2
13.5				-2	
12.5			-2		0
11.5		-2		0	
10.5	-2		0		2
10.0					
9.5		0		2	3
9.0					3.5
8.5	0		2	3	
8.0				3.5	
7.5		2	3		
7.0			3.5		
6.5	2	3			
6.0		3.5			
5.5	3				
5.0	3.5				

Mounting plate height

Inset[1] K19



Mounting plate height 2

[1] Set mounting plate back by door thickness +1.5 mm

Door reveal \ Cup distance	3	4	5	6	7
0.0		0		2	3
0.5					3.5
1.0	0		2	3	
1.5				3.5	
2.0		2	3		
3.0	2	3			
4.0	3				

Mounting plate height

MINIMUM GAP

Door thickness \ Cup distance	3	4	5	6	7
24.0	1.2[2]	2.1[2]	3.0[2]	3.9[2]	4.7[2]
22.0	1.0	1.1[2]	2.0[2]	2.9[2]	3.8[2]
21.0	1.0	1.0	1.6[2]	2.4[2]	3.3[2]
20.0	1.0	1.0	1.1[2]	2.0[2]	2.9[2]
19.0	1.0	1.0	1.0	1.5[2]	2.4[2]
18.0	1.0	1.0	1.0	1.0	1.9[2]
17.0	1.0	1.0	1.0	1.0	1.5[2]
16.0	1.0	1.0	1.0	1.0	1.0

Minimum gap

[2] 1.0 at 85° opening angle

MINIMUM REVEAL

Door thickness \ Cup distance	3	4	5	6	7
24.0	6.4	5.4	4.4	3.4	2.4
22.0	3.0	2.0	1.5	1.5	1.5
21.0	1.4	1.3	1.3	1.3	1.3
20.0	1.1	1.1	1.1	1.1	1.1
19.0	0.9	0.9	0.9	0.9	0.9
18.0	0.7	0.7	0.7	0.7	0.7
17.0	0.6	0.6	0.6	0.6	0.6
16.0	0.6	0.6	0.6	0.6	0.6

Minimum reveal (F)

85° OPENING ANGLE

Door thickness \ Cup distance	3	4	5	6	7
36.0	11.1	10.3	9.7	9.1	8.5
30.0	5.4	4.8	4.4	4.3	4.2
28.0	3.7	3.6	3.5	3.4	3.3
26.0	2.9	2.8	2.8	2.7	2.6
24.0	2.2	2.1	2.1	2.1	2.0
22.0	1.6	1.6	1.6	1.5	1.5
21.0	1.4	1.3	1.3	1.3	1.3
20.0	1.1	1.1	1.1	1.1	1.1
19.0	0.9	0.9	0.9	0.9	0.9
18.0	0.7	0.7	0.7	0.7	0.7
16.0	0.6	0.6	0.6	0.6	0.6

Minimum reveal (F) [3] at 85°

[3] 85° opening angle reduction clip

NOTES

The minimum gap is the clearance required between the front edge of the cabinet and the closed door so that the door can open without hindrance.

Minimum reveal for doors with bevelled edges (R = 1 mm) (factory setting).

For door thicknesses of 24 mm and above, a trial fitting is recommended.

DRILLING PATTERNS 45/9.5

For screw fixing



For press fitting



Combination drilling pattern for Impresso

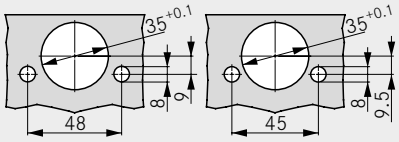

CUP DIMENSIONS