


SLIDING CLOSER TYPE III FOR SLIDING GLASS - DOOR INSTALLATION INSTRUCTIONS

Please pay attention
to the followings before starting installation.

Keep the door in smooth moving.


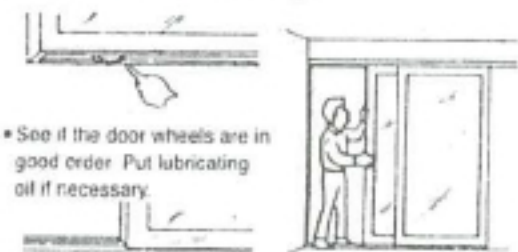


• Make the sliding rails clean. • See if the door are placed in correct positions



• Keep the door in light and smooth sliding condition in manual use.


Components

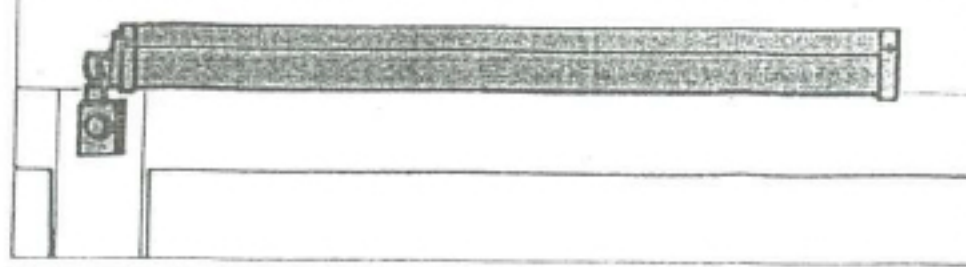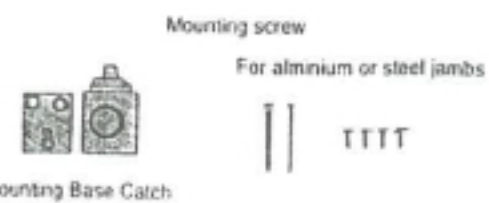

How to install


1 Drill the fixing Screw hole

Keep the door closed when fixing the screw holes position. Refer to template sheet (on the back side) for details. Drill 3.2mm screw holes for aluminium or steel jambs. Pay particular attention to the screw-pitch between center of mounting base and the 1st fixing screws.

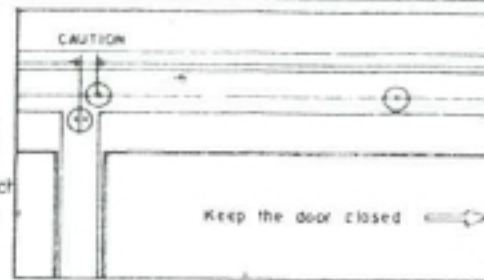

2 Install the closer body to the top jambs



Mount the closer body with two fixing screws.

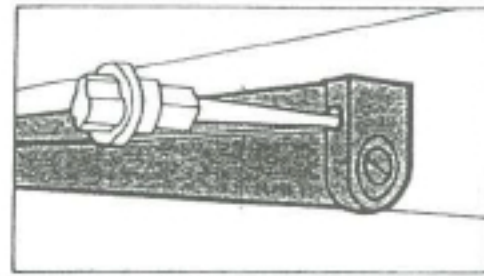

3 Install the mounting base and catch on the door frame.

1. Install the mounting base on the door.

2. Slip-in the catch into mounting base and fasten the screw lightly.

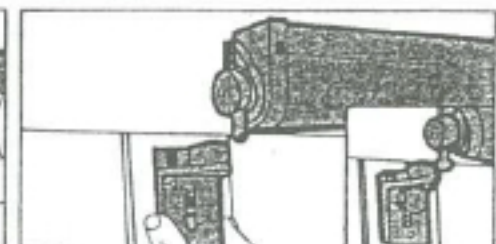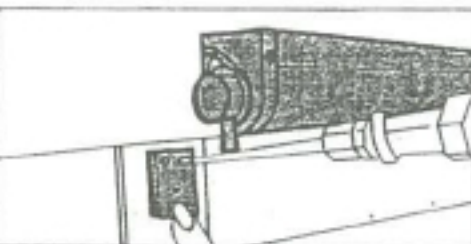


caution: In case size A is bigger than 12 mm, place proper plate or block under the mounting base. Keep the clearance (B) more than 3 mm.



4 Connect the joint pin and catch


Pull out the joint pin and adjust the catch by sliding up to connect each other properly

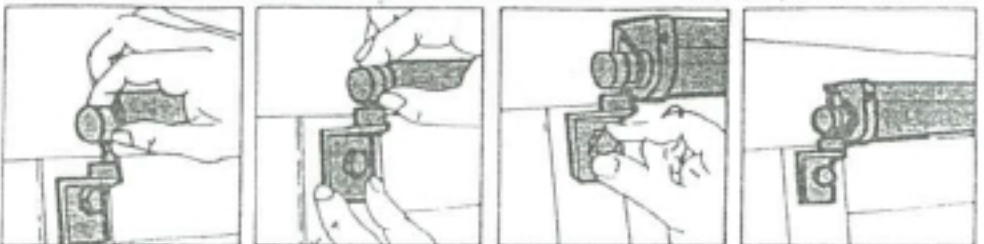


Newstar Door Control (UK) Ltd. SLIDING CLOSER TYPE III

5 Adjustment of Door closing speed and power

1. Remove the cover (as this cover is fixing in system, it can be removed simply when pull the upperside of it.)

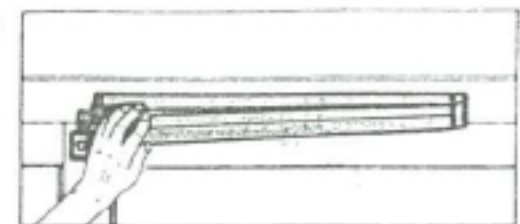


2. Remove the Filter

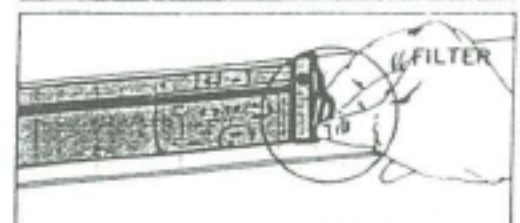


3. Closing speed adjustment (A)

Closing speed is adjusted by turning the adjusting valve while opening and closing operation of the door. To slow-up, rotate the valve to clockwise, and to counter-clockwise for faster speed.

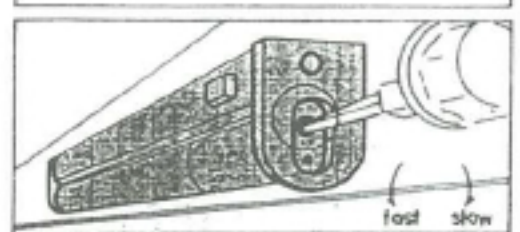


4. Closing power adjustment (B)

Rotate the adjusting screw by screw driver. (To clockwise for stronger, and to counter-clockwise for weaker) See indications shown on side of closer body (inside circle O).

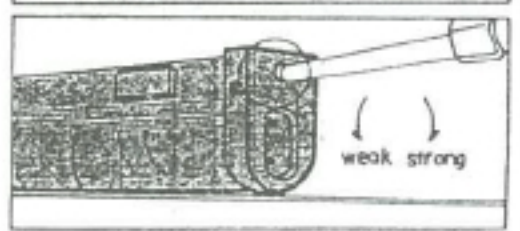


caution: Keep the indication-pin inside Max. and MIN. power indication.

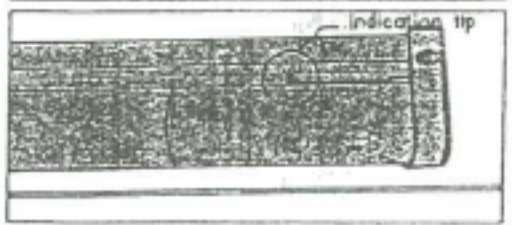

6 Place the filter and cover for completion.

caution: Take off the protection sheet of the adhesive tapes when placing the cover onto the closer body

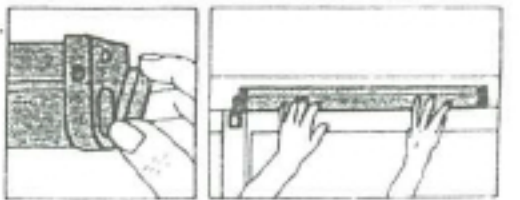


※ For holding the door open or using it manually as the ordinal sliding door.


1 Loosen the screw of the catch and slip down to come apart the joint pin, from the catch. Then, the door can be used manually as ordinal sliding doors



Slip down the catch

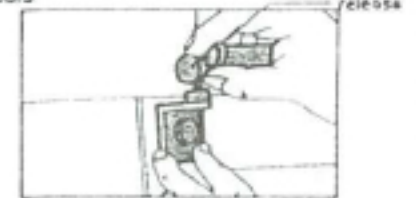

Standard line of mounting screws
(center of vertical door frame)

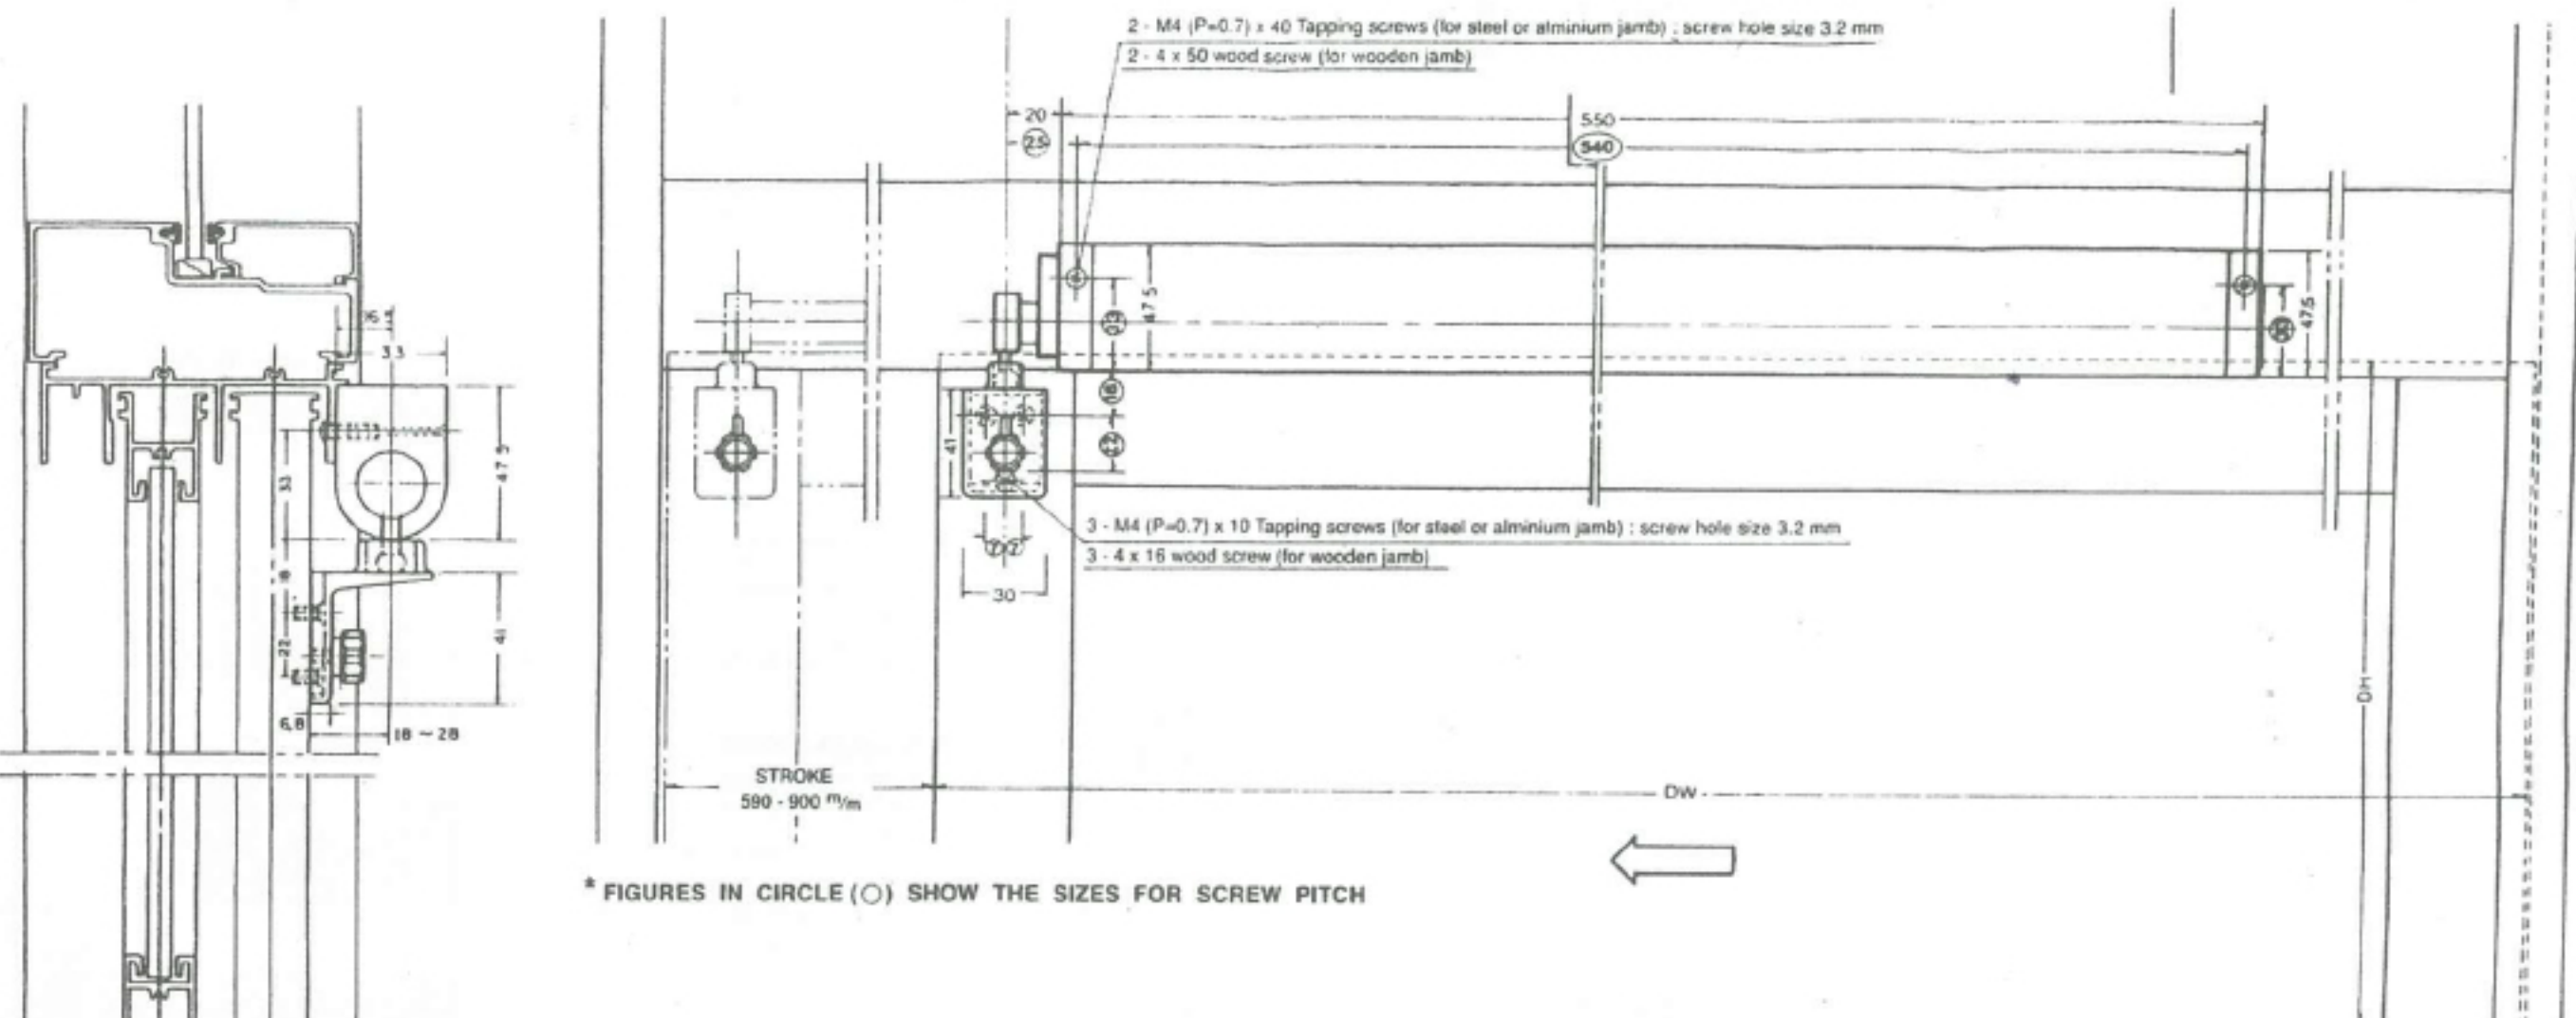

FOR HOLDING THE DOOR OPEN AND USING IT MANUALLY AS ORDINAL SLIDING DOOR

SLIDING CLOSER TYPE III

