

VARIANT VX - VX 7531 3D

VX 7531 3D

for rebated and unrebated doors with block frames



Product features

- for extreme heavy rebated and unrebated heavy-duty doors
- for block frames
- for heavy-duty hinges VARIANT VX
- continuous 3D adjustment (side + 2.0/- 4.0 mm, height +/- 3.0 mm, compression +/- 3.0 mm)



Technical data

Property	Value
Load capacity	400.0 kg
Cutter diameter	24.0 mm
Collar ring diameter	30.0 mm

Notes

The load capacity mentioned above refers to two hinges per door leaf (1 x 2 m). Also the load capacities of the respective combined receiver have to be taken into consideration. For detailed information please look at the chapter [technical information](#).

Cover angle/plate form a unit together with the receiver. They have to be ordered separately.

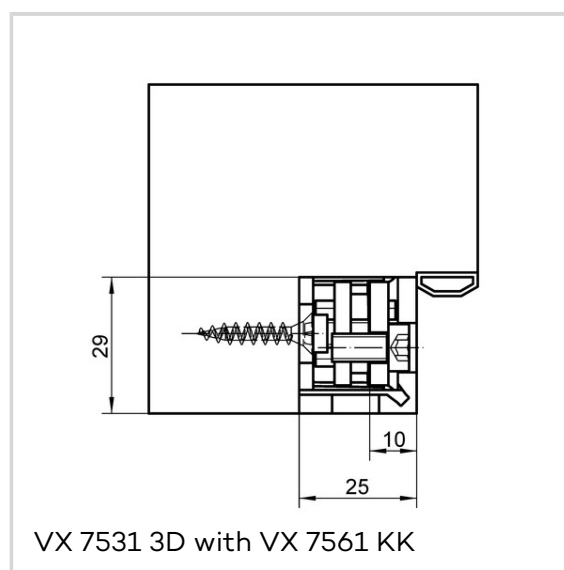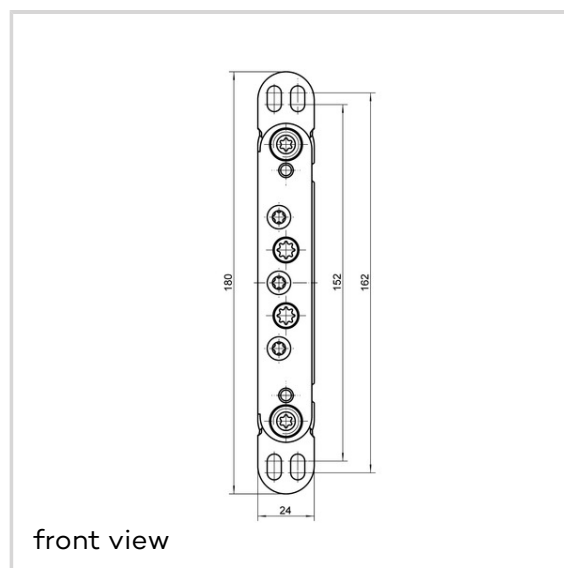

VARIANT VX - VX 7531 3D

For fixing the cover angle chipboard screws of at least 5.0 x 40.0 mm are recommended.

Installation tools

Universal milling frame
 Drilling jig VARIANT VX
 7531 3D
 Template 5 250568 5
 Template 5 250569 5

Combinations

VX 7939/160-4
 VX 7939/160-4 FD
 VX 7939/160-4 FD 18/5
 VX 7939/160-4 FD 18/12
 VX 7859/120
 VX 7859/160-4
 VX 7859/160-4 FD
 VX 7859/160-4 FD 18/12
 VX 7729/160-4
 VX 7939/160-4 VBRplus
 VX 7939/160-4 FD VBRplus
 VX 7729/160-4 VBRplus
 VX 7749/160-4 40 Care
 VX 7749/160-4 45 Care
 VX 7749/160-4 50+65 Care
 VX 7749/160-4 70 Care
 VX 7729/160-4 HA MSTs
 VX 7561 KK
 VX 7561 KR
 VX 7571 KK
 VX 7581
 VX 7591

Item versions

Finish	blue galvanized (SW 010)
VPE	Pack of 10
DIN	DIN right and left hand
ITEM NO.	5 071254 0 01006
ITEM NO. (SAP)	500001224
EAN	4015471116262

