



SDS LONDON

ARCHITECTURAL IRONMONGERY

020 7228 1185 | www.sdslondon.co.uk

TECHNICAL SPECIFICATION SHEET

PRODUCT SPECIFICATIONS


- Available in 60mm backsets
- Adjustable roller latch bolt
- Case size (60mm backset) - 90 x 165mm
- Face plate - 235 x 22 x 3mm
- Stainless Steel latch bolt & dead bolt
- Includes grip tight follower spring
- Includes anti-rattle strike and dust box
- Available with square & radius forends
- All factory QC tested
- 10 year mechanical guarantee

External / Outside access.

The roller latch bolt is operated externally with one half of the unsprung lever set, this release the roller latch bolt as normal. Underneath the lever is the release & indicator, this operates in the same manner as bathroom type coin releases.

Internal / Inside access.

The internal side of the lever set will be configured such that, the latch bolt is blanked off with an engraved covered escutcheon. The deadbolt features the second lever handle, and by throwing the handle up "extends the deadbolt" & locks the door. By turning the handle down the deadbolt is withdrawn, further downward action of the lever withdraws the roller latch bolt, allowing exit.

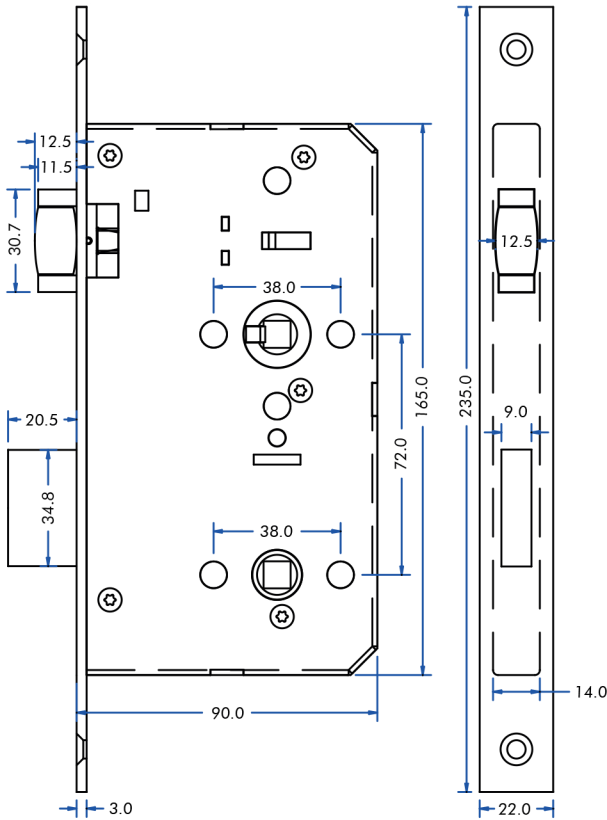

TYPICAL CONFIGURATION

