




HÄFELE 110° SMUSO QUICK FIXING SOFT CLOSE HINGES




- > Opening angle 110°
- > Full overlay, half overlay/twin or inset mounting
- > Automatic closing
- > Ø 35 mm cup
- > For door thickness 14-26 mm see table below
- > Side adjustment ±3 mm, height adjustment ±2 mm (via mounting plate), depth adjustment ±2 mm
- > Screw fixing cup
- > Smuso - with integrated soft closing mechanism
- > Quick fixing arms
- > Drilling pattern 45/9.5
- > Integrated soft close
- > Nickel-plated pressed steel cup and arm
- > Order fixing screws separately for screw fixing versions
- > Order qty: 1 pc

Drilling dimensions for cup fixing
Drilling pattern 45/9.5

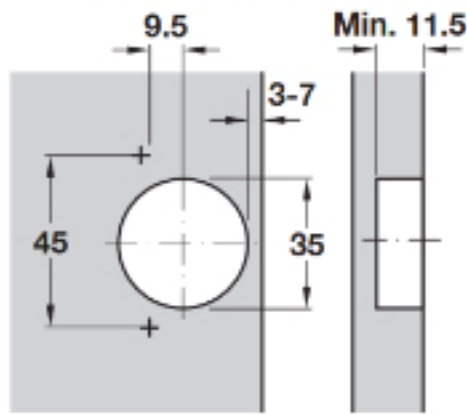

Full overlay mounting

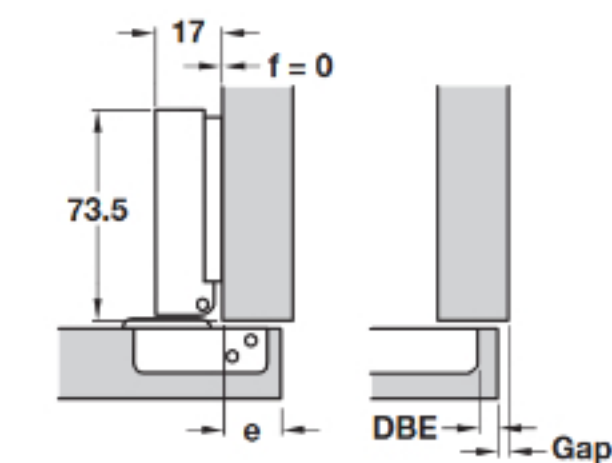

| Overlay - coverage of the side end by door e mm | | | | | | | | | |
|---|----|----|----|----|----|----------------------------|----|----|---|
| 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | |
| | | | | 3 | 4 | 5 | 6 | 7 | 0 |
| | | 3 | 4 | 5 | 6 | 7 | | | 2 |
| 3 | 4 | 5 | 6 | 7 | | | | | 4 |
| DBE distance to cup bore edge mm | | | | | | Mounting plate height f mm | | | |



smuso



| | |
|------------------|------------|
| Drilling pattern | 45/9.5 |
| Screw fixing | 311.04.000 |