


Touch Release and Heavy-Duty Touch Release Stays closed, push to open Optional Face Frame Brackets APPLICATIONS: For use in wood pedestals, dresser, and desk drawers, casework, residential and kitchen cabinetry. Heavy Duty Touch Release provides stronger stay-closed feature. Not intended for lateral file* drawer applications. Use for side mount only. This product is covered by U.S. and various foreign patents issued and/or pending.

<u>3832TR/HDTR</u> QUICK REFERENCE BOX

Side Space: 1/2"+1/32"X2 Lengths: 12"–28" Overall Slide Dimensions:1.80X1/2" Load Rating: 100 lbs.* Touch Release Feature

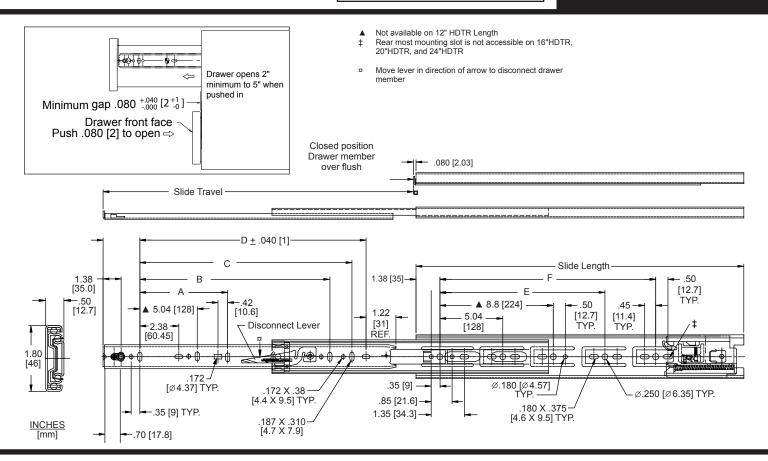

Finish	Clear electroplate (C), black electroplate (CB), or white electrocoat (EW) finish (RoHS compliant)	Part Number	Slide Length	3832TR Travel	А	В	С	D	E	F
Load Rating	100 lbs. [45.5 kg] per pair ◆	3832-C12TR 3832-C12HDTR	11.81 [300]	12.00 [305]				7.58 [192]		
Length	12"–28" [300 mm–700 mm]	3832-C14TR 3832-C14HDTR	13.78 [350]	14.00 [356]				9.55 [242]		
Hardware	Flat head 6 mm Euro System screw or #8 pan head screw	3832-C16TR 3832-C16HDTR	15.75 [400]	16.00 [406]				11.51 [292]	11.34 [288]	
Side Space	.50" (+ .031-0.00) [12.7 mm] (+ 0.8-0.0)	3832-C18TR 3832-C18HDTR	17.72 [450]	18.00 [457]		12.60 [320]		13.48 [342]	12.60 [320]	
Travel	Full extension	3832-C20TR 3832-C20HDTR	19.69 [500]	20.00 [508]		12.60 [320]		15.45 [392]	15.12 [384]	
Height	1.80" [45.7 mm]	3832-C22TR	21.65	22.00	8.82	16.38		17.42	16.38	
Disconnect	Handed lever disconnect	3832-C22HDTR	[550]	[559]	[224]	[416]		[442]	[416]	
Mounting	Side, optional face frame brackets	3832-C24TR 3832-C24HDTR	23.62 [600]	24.00 [610]	8.82 [224]	16.38 [416]		19.39 [492]	13.86 [352]	18.90 [480]
Features	Drawer member vertical cam adjustment	3832-C26TR 3832-C26HDTR	25.59 [650]	26.00 [660]	8.82 [224]	16.38 [416]	20.16 [512]	21.36 [542]	13.86 [352]	20.16 [512]
Ball Bearings	C and CB finish: Steel EW Finish: Acetal polymer in drawer	3832-C28TR 3832-C28HDTR	27.56 [700]	28.00 [711]	8.82 [224]	16.38 [416]	20.16 [512]	23.33 [592]	13.86 [352]	21.42 [544]
	ember * A lateral file drawas is wider than it is doop									

NOTES: • Drawer width should not exceed slide length.

* A lateral file drawer is wider than it is deep.

Load rating based on 18" slides mounted in a 16" wide drawer cycled 50,000 times.


Installation Instructions


Drawer Box Preparation

- 1. Drawer box width should not exceed slide length.
- Slides will not function properly is side space is less than .50" [12.7 mm]. For optimum performance, construct drawer 1-1/16" [27.0 mm] smaller than cabinet opening.


Overlay Mounting

- 1. Cabinet member installation:
 - Conventional mounting, See Figure 1.
 - 32 mm system mounting, see Figure 2.

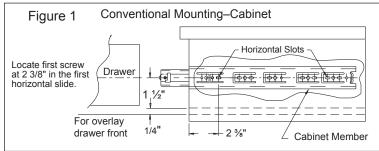

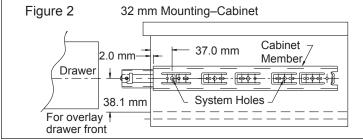

2. Use only the 32 mm system holes or the wood screw holes located at the tip of the breathing tabs. Do not use any other holes on the cabinet member for mounting (Figure 3).

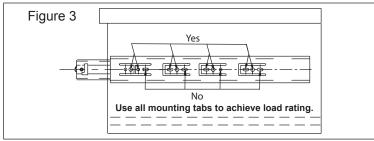


Inset Mounting Instructions

- 1. Mount the **cabinet member** .080" [2 mm] plus drawer front panel thickness back from the front of the cabinet.
- 2. Mount the drawer member flush to the back surface of the drawer front panel.

Drawer Member Installation

- See figure 4 for drawer member setback
- Install the drawer member with a screw through the cam adjuster and a screw through the hole or slot at the rear (Figure 5).

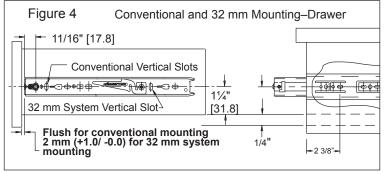


For the most current technical information visit www.accuride.com

Drawer Installation and Adjustment

1. Make sure the ball bearing retainers in the cabinet side are fully forward. Install drawer into cabinet. Close the drawer.

2

2. For cam adjustment, open drawer and rotate the cam with a Phillips or Pozi screwdriver to vertically position the drawer in relation to the cabinet.



Install additional set screws to secure.



Slide Ordering Instructions

Complete your slide order for Accuride models 3832CTR and 3832CHDTR by specifying the following:

	50 pair	C	3832	CIS HUIR		KΡ
	<u>50 Pair</u>	<u>C</u>	<u>3832</u>	<u>C18</u>	<u>TR</u>	<u>D</u> *
Total Required Slides Slide Finish						
Slide Model						
Slide Length						
Push Close/Open						
Polybag Packaging						

*D-Pack only for 3832CTR

Optional Face Frame Brackets

Optional face frame brackets available. See Face Frame Conversion Kit technical sheet part number 4180-0661-XE for models 3832CTR and 3832CHDTR.

Packaging

Distributor (D) Pack: All lengths are packaged 10 pair per box. Polybag includes one pair of slides with mounting screws (3832CTR only).

Bulk (P) Pack: All lengths are packaged 10 pair per box. Slides and screws are ordered and packaged separately (3832CTR and 3832CHDTR).

Specifications

Slide members and ball retainers: Cold rolled steel Ball bearings: Carburized steel/acetal polymer

RoHS compliant

NOTE: Specifications, materials, prices, terms, and delivery are subject to change without notice.

curide

ACCURIDE INTERNATIONAL INC. 12311 Shoemaker Avenue Santa Fe Springs, CA 90670 TEL (562) 903-0200 FAX (562) 903-0208 www.accuride.com Manufacturing, Engineering, and Sales United States • Germany • Japan • Mexico • United Kingdom • China Copyright © 2007 Accuride International Inc. 3700-9503(1178)-R2-0709