



**FITTING INSTRUCTIONS - NOTICE DE POSE - MONTAGE HANDLEIDING - MONTAGEANLEITUNG  
ISTRUZIONI DI MONTAGGIO - INSTUCCIONES DE MONTAJE**

**Tools Required**

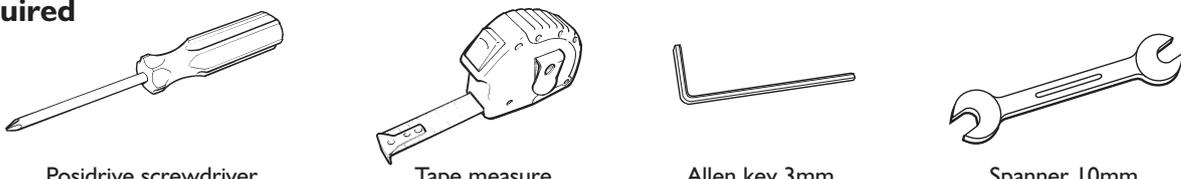


Posidrive screwdriver      Tape measure      Allen key 3mm      Spanner 10mm

**Contents of Kit**

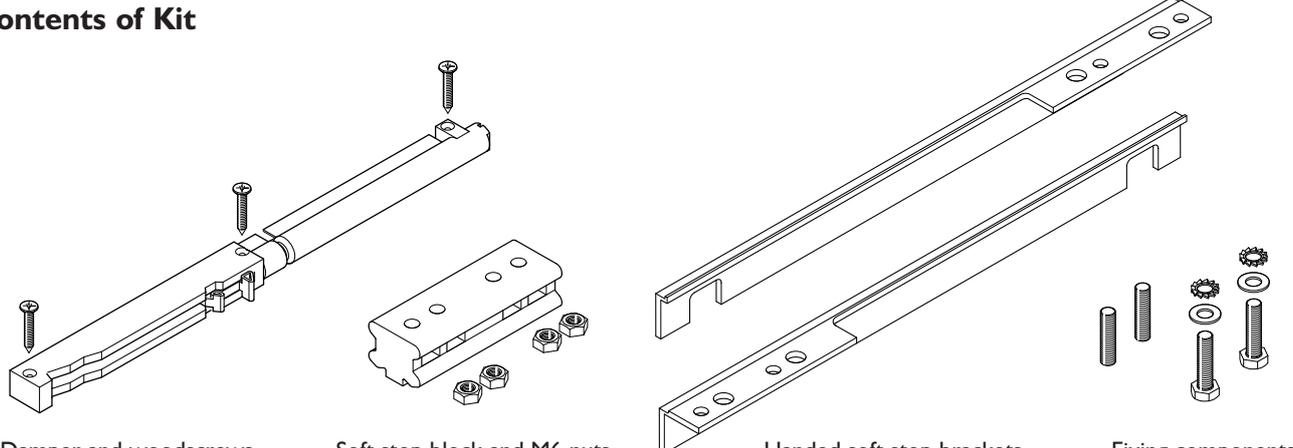


Damper and woodscrews      Soft stop block and M6 nuts      Handed soft stop brackets      Fixing components

**Please note position of handed brackets**

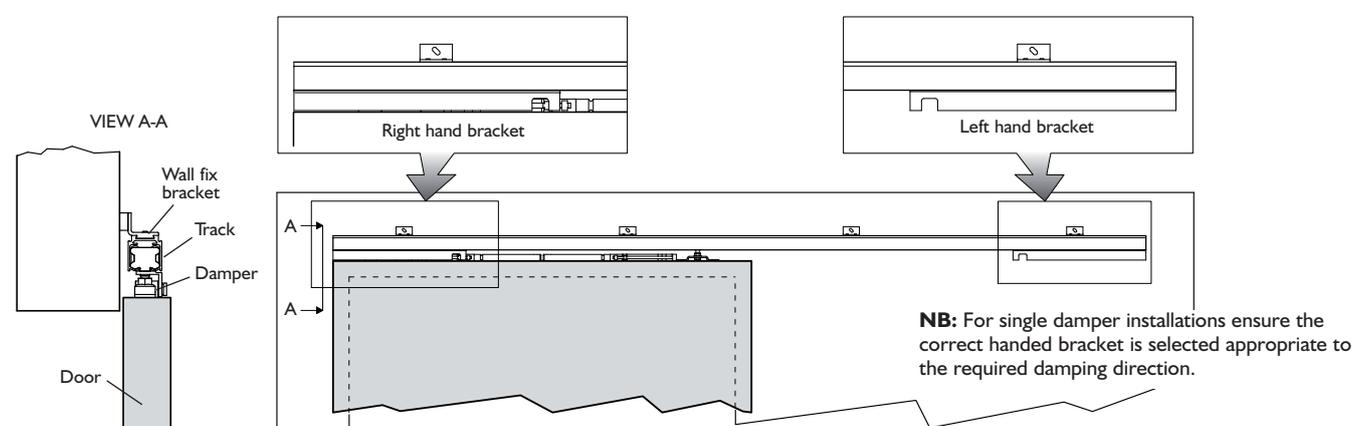

**NB:** For single damper installations ensure the correct handed bracket is selected appropriate to the required damping direction.

**STANDARD INSTALLATION** You should first determine where you want the door to stop in relation to the position in the track

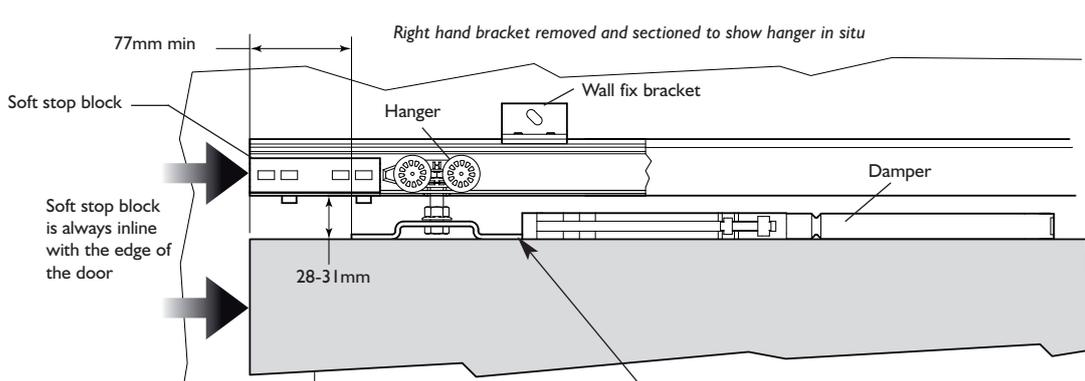


77mm min      Right hand bracket removed and sectioned to show hanger in situ      Wall fix bracket      Damper


Soft stop block is always inline with the edge of the door

28-31mm      Damper to be butted up to apron piece

**POCKET DOOR INSTALLATION** You should first determine where you want the door to stop in relation to the position in the track

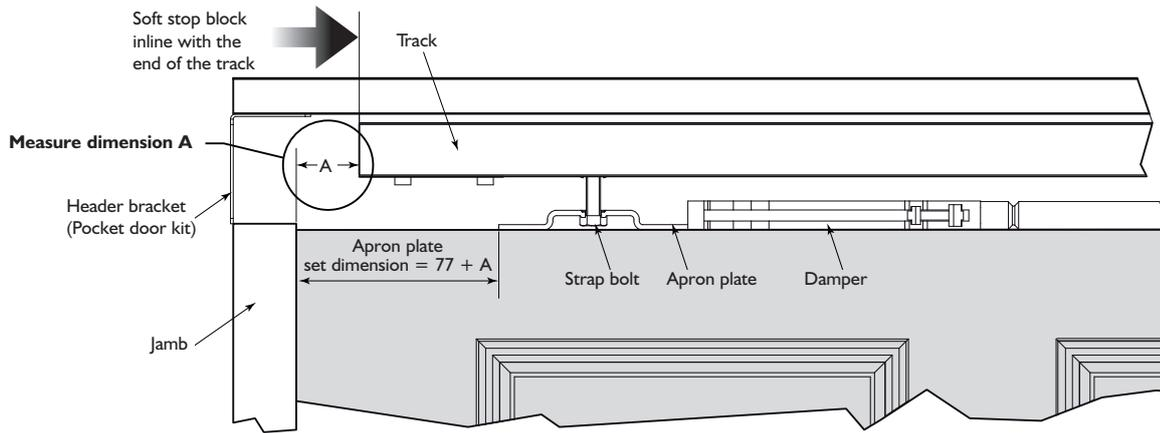


**I With the offset in mind - secure the damper and hanger to the top of the door**

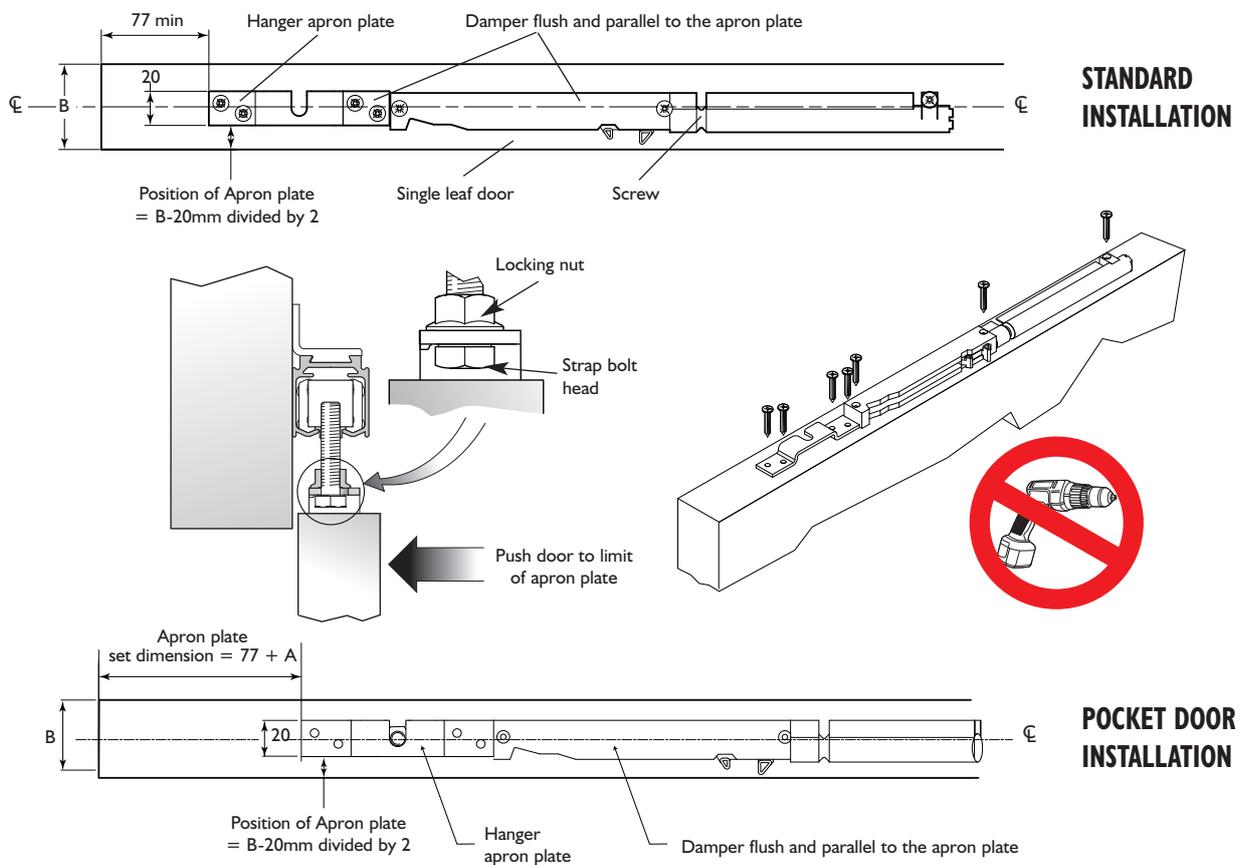


**2 Sub assemble the bracket and block with the fixings supplied**


Leave fixings loose within the assembly until the position within the track is final

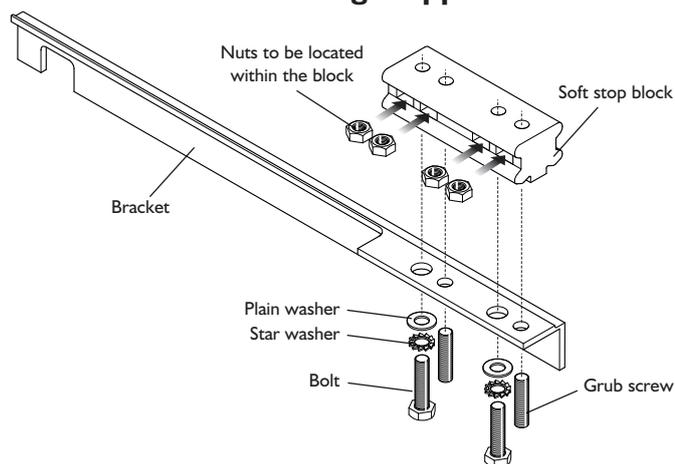


**3 Locate the sub assembled bracket into the end of the track**

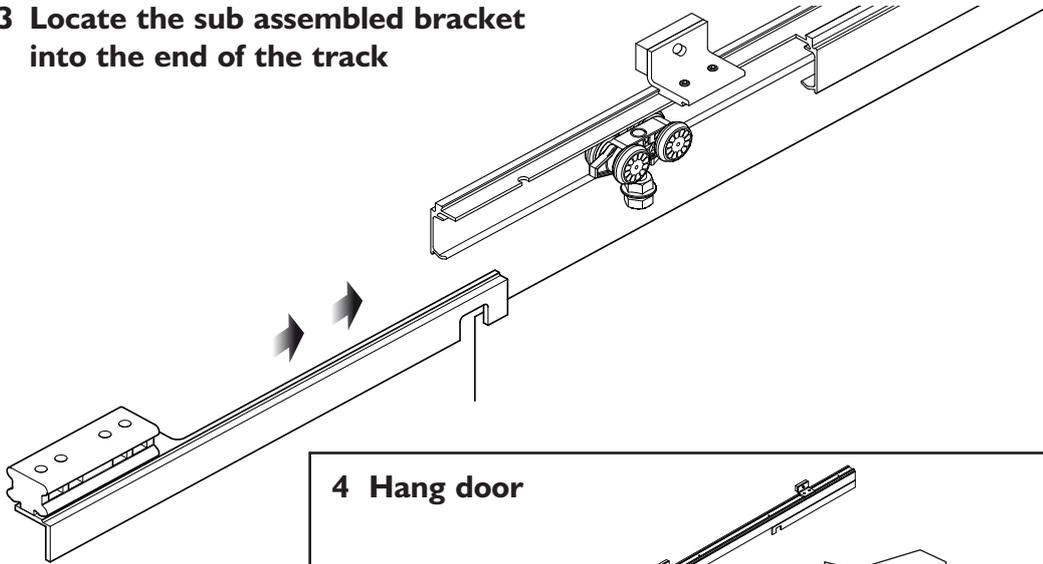


**4 Hang door**

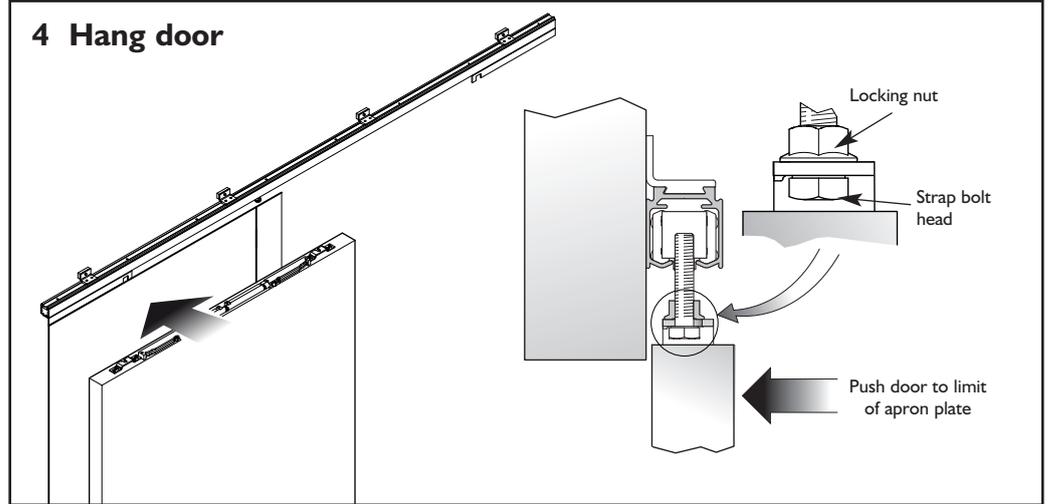

**5 Ensure the door runs straight and inline with the track**

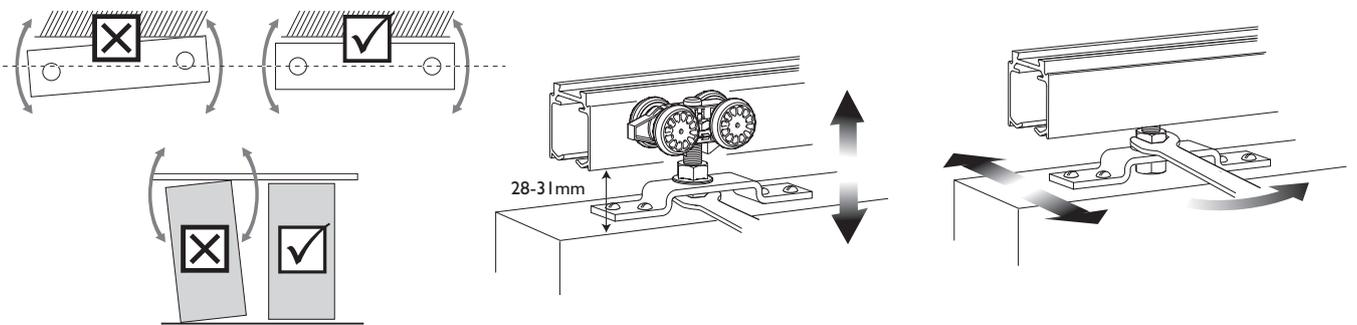


**6 Once positioned, secure the soft stop block to the track by tightening the grubscrews. Secure the bracket to the underside of the track by tightening the bolts**

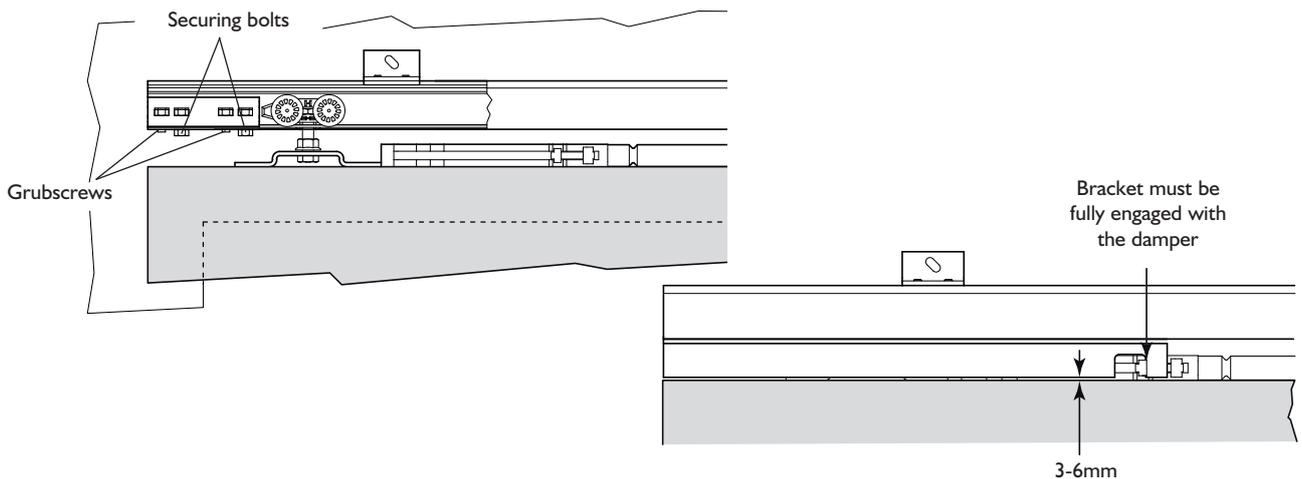

## 7 Ensure sufficient engagement with damper. Adjust height at apron plate to suit drop

### PLEASE NOTE:

Single damper installation; Minimum door width = 726mm  
 Double damper installation; Minimum door width = 1020mm  
 Double damper not available on pocket door

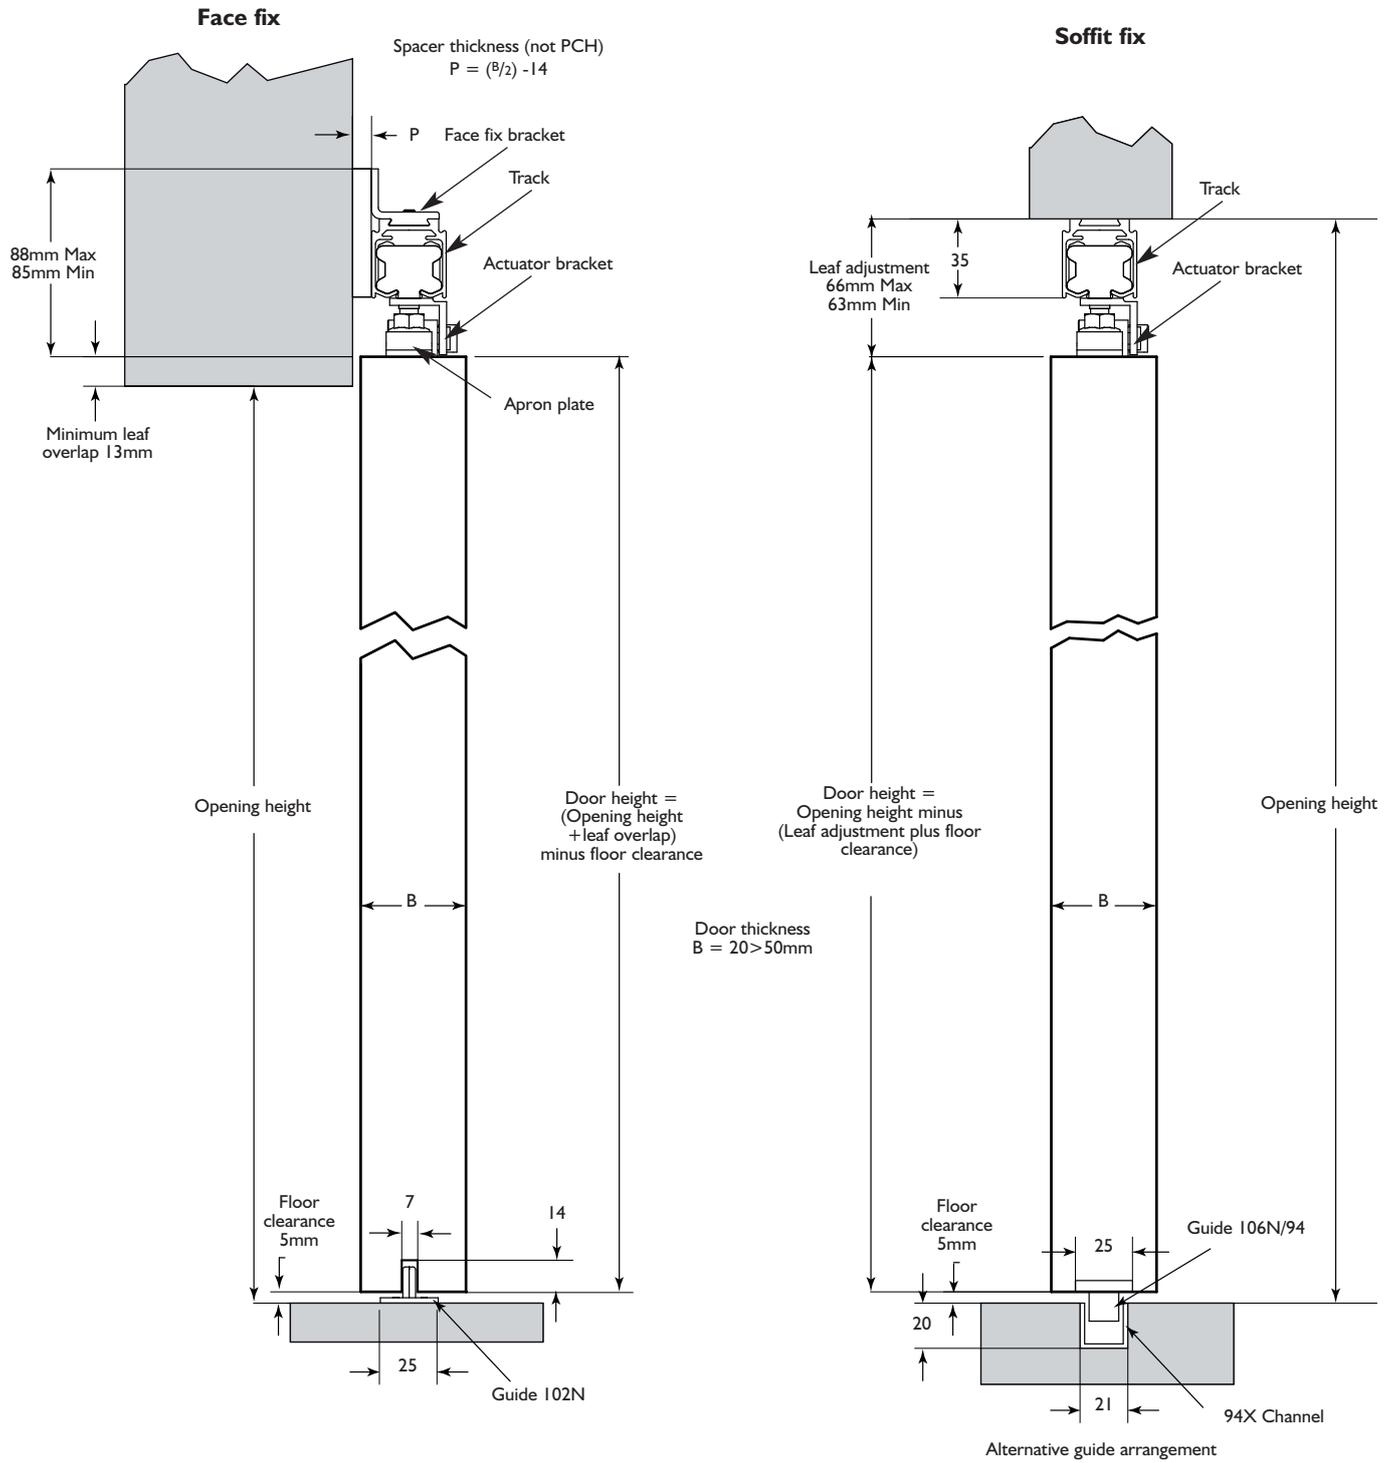

**REFER TO HUSKY INSTRUCTIONS FOR GENERAL TRACK INSTALLATION DETAILS**

(All dimensions in mm)